
# E75 Opening Window System

Optimized for advanced mechanical performances.

Straight line profiles for modern aesthetics. Wide variety of features and typologies are available.



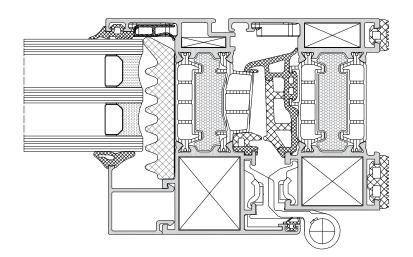

## **Technical features**

Straight line

Glazing infill : up to 55mm in frame

Double & triple glazing option

Frame depth: 75 mm

Vent depth: 84.5 mm

Min. height (frame+leaf):107 mm

Compatible with curtain wall system

Energy efficiency concepts: Advanced, Improved & Basic

### **Performance**

Air Permeability:	up to <b>Class 4</b>
Watertightness:	up to class <b>E1500</b>
Resistance to wind load:	up to class <b>C5</b>
Thermal transmittance (U <sub>f</sub> ):	from <b>1.2 W/(m²K)</b>
Acoustic performance:	up to <b>46 dB</b>
Burglar resistance:	up to class <b>RC2</b>

#### Hardware

Extruded aluminium corners

Eurogroove + PVC groove


Max. vent weight:170 kg

Concealed hinges

Multiple locking points

# **Typologies**

- Turn, tilt & turn, tilt, projecting, folding, fixed, parallel sliding, doorheight window
- Single & double leaf
- Rectangular, variable angle & bended

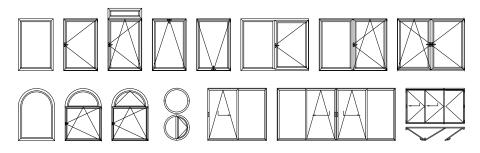

# **Surface treatment options**

RAL colours

ETEM colours

Anodising

Wood effects

Quality Standards:

- OUALICOAT
- OUALANOD
- QUALIDECO



